



# #PERFECTA SiO2

CERAMIC QUICK DETAILER  
ANTI DUST FORMULA



Extreme  
shine



Extra  
protection



Hydrophobic  
barrier



## DESCRIPTION

- ▶ **Sealing protection** SiO2 and TiO2 siloxane polymers enable it to leave surfaces with an unmistakable reflective gloss that enhances the lines of the bodywork.
- ▶ **Protective shield** incredible self-cleaning action that fends off dirt, water and UV rays, creating a protective shield and keeping your vehicle cleaner for longer. Its performance is guaranteed up to 3 washes with a neutral shampoo.
- ▶ **Ceramic quick detailer** it can be used to improve the shine of paintwork and remove light dirt or as a ceramic spray when you need to increase gloss and hydrophobic performance.
- ▶ **Perfect for post-coating maintenance** it maintains and prolongs the beading and sheeting hydrophobic performance of previously applied sealants and nanocoatings.

## DIRECTIONS FOR USE

- ▶ **Preparation:** Wash the car thoroughly and remove any iron or other build-up using our product #SIDERO.
- ▶ **Step 1:** Shake bottle well. Treat wet or dry paintwork, covering a maximum area of half a metre at a time.
- ▶ **Step 2: On a dry car.** Spray it or dispensing it on a short-hair microfiber cloth and then spread it over the area to be treated, then make a finishing pass with a clean, dry, long-hair microfiber cloth. The second option is to spray it directly on the bodywork and spread it with a short-hair microfiber cloth, without pressing too hard, finishing by drying with a clean and dry, long-hair microfiber cloth.
- ▶ **Step 2: On a wet car.** Spray directly on the paintwork and spread with a "SUPER DRYER" microfiber cloth. Two or three sprays per area are enough. Use no more than two sprays on small areas.
- ▶ **Step 3: Polishing.** Use a clean, high-quality microfiber cloth and polish to a high-mirror finish before moving to the next area of the paintwork. Use more than one cloth if necessary. A second layer can be applied, but you must wait 24 hours. Full product curing takes 12 hours.

## WARNINGS

Do not use in direct sunlight or on warm paintwork. For best results, do not apply with temperatures above 25°C. The product can be used on wet surfaces, but for best results it should be applied on a dry surface.

## ACCESSORIES



Spray



Short-hair  
and long-hair  
cloth

## DILUTIONS




Pure

## SURFACES



Bodywork

## VEHICLES

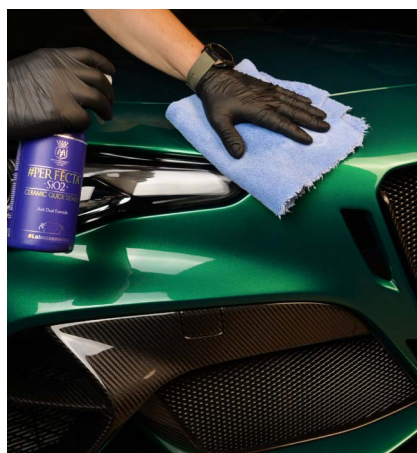

## FEATURES

Physical state	White liquid
pH value at 20°C	5
Density at 20°C	1,00 g/cm <sup>3</sup>
Solubility in water	Fully miscible

## AVAILABLE FORMATS

Code	Format		
LAB103	500ml Bottle	4	168

SEE THE SAFETY DATA SHEET OR THE LABEL  
FOR PRODUCT SAFETY INFORMATION.